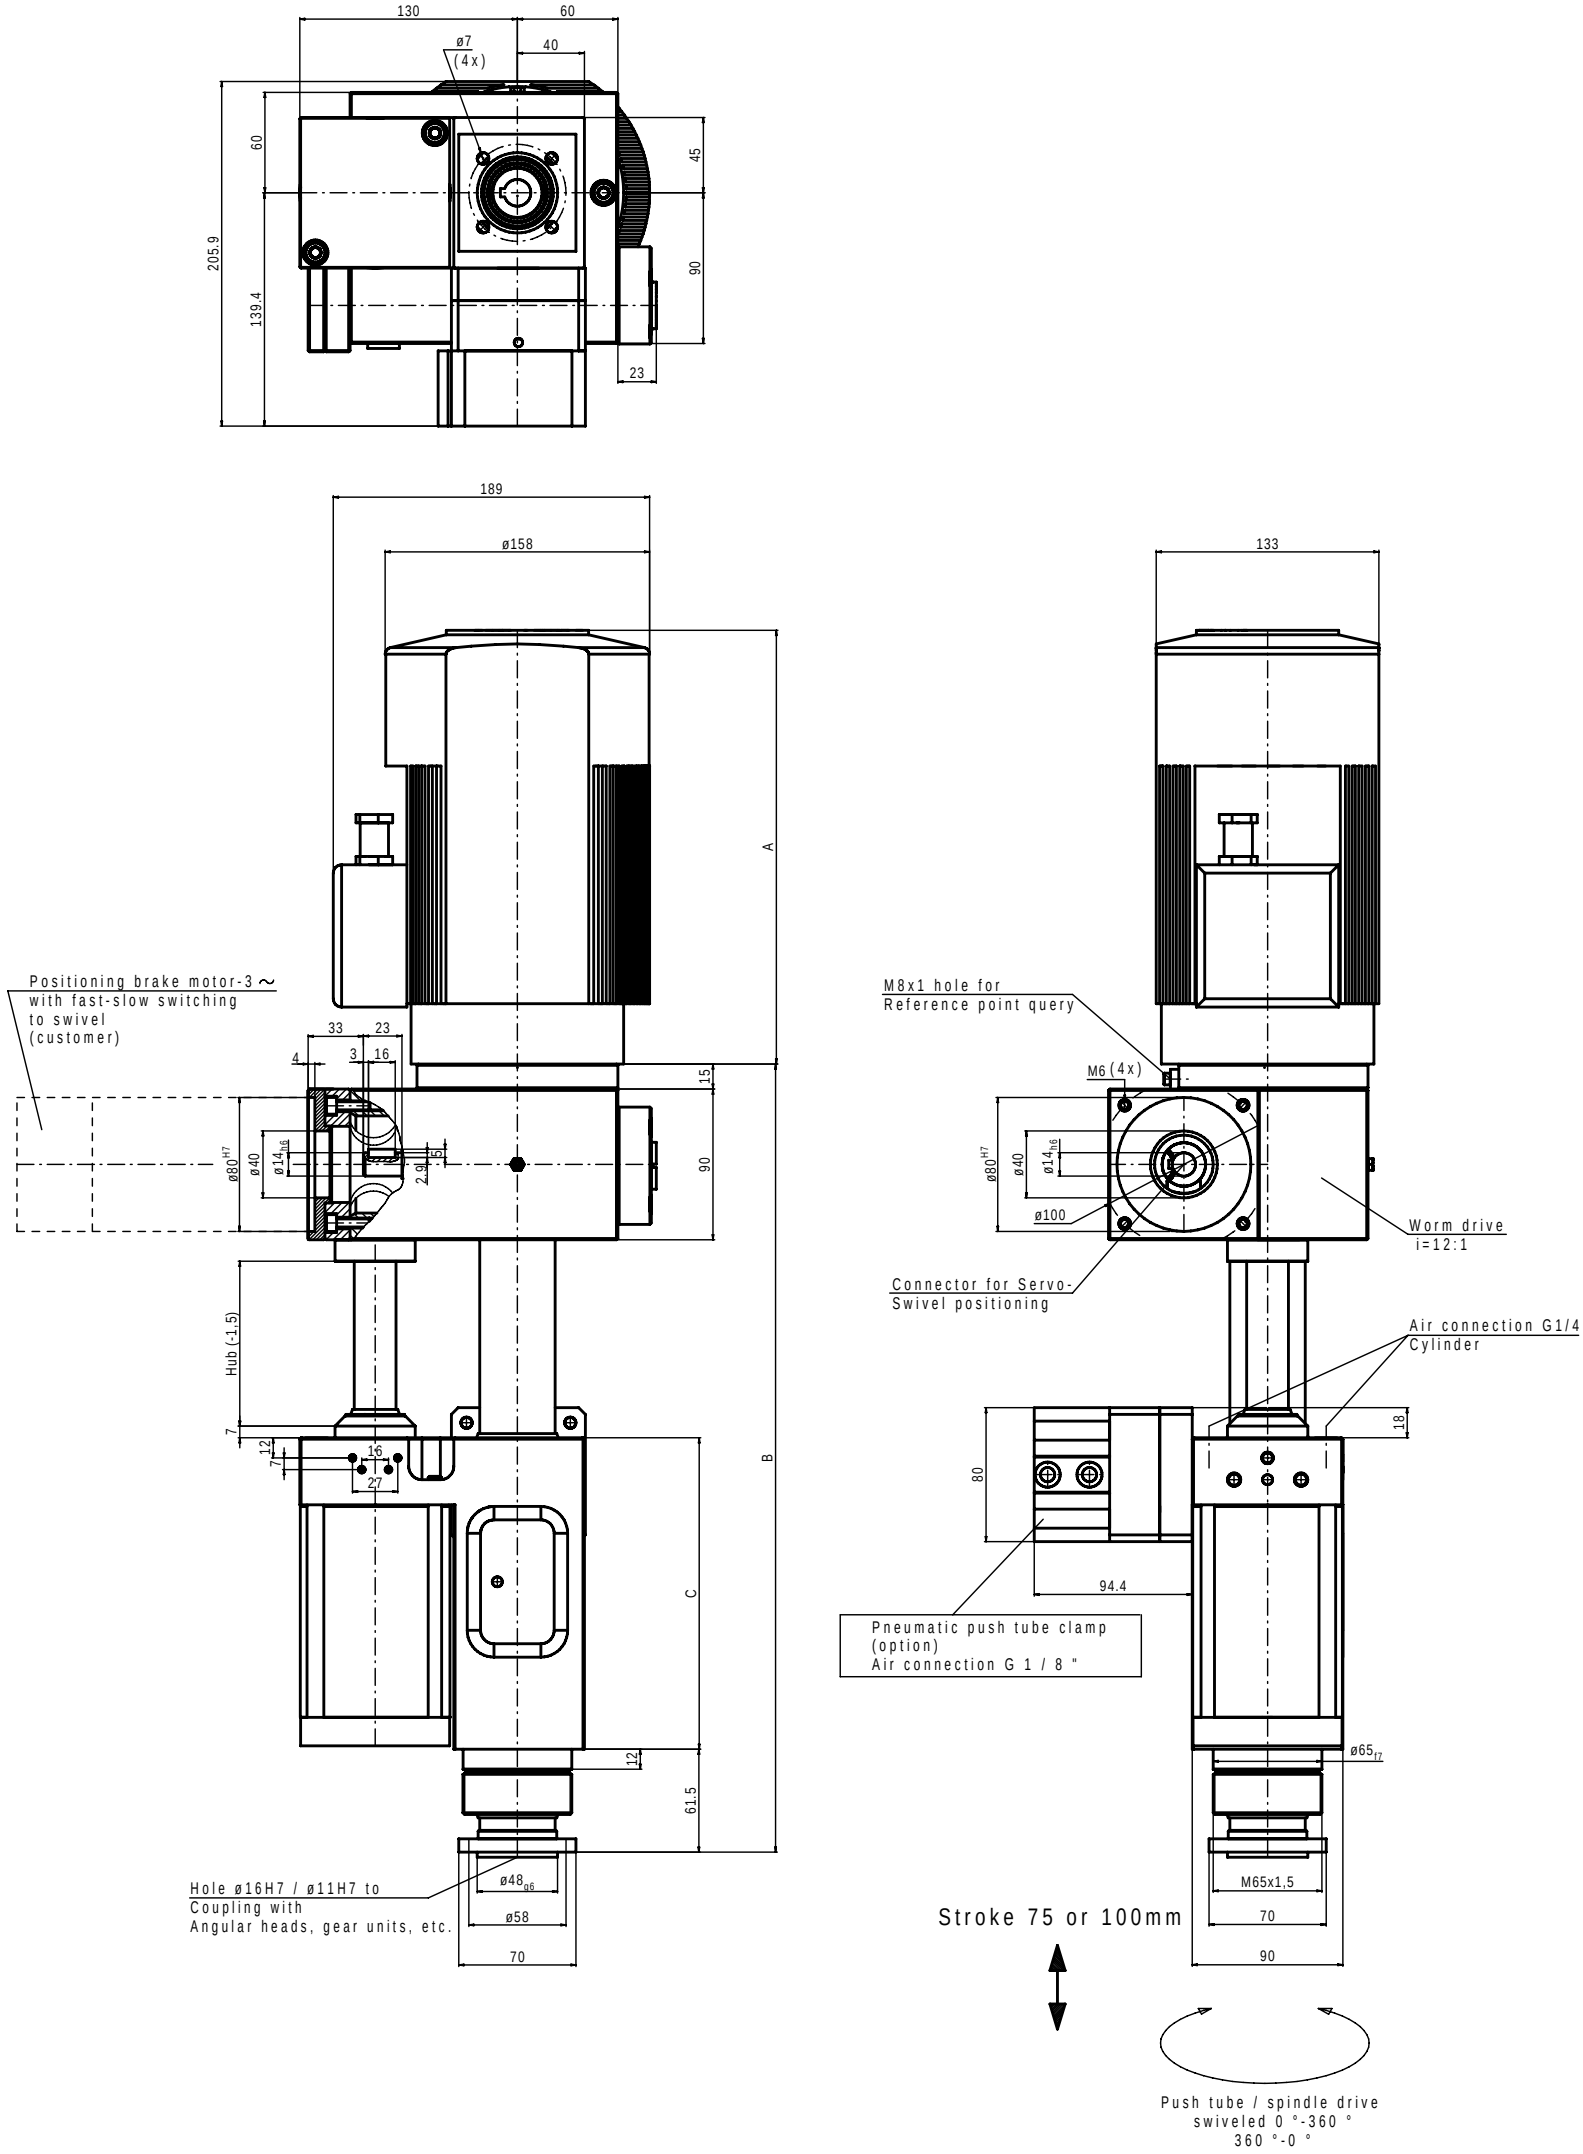
130
60
40
ø7
(4x)
60
45
205.9
90
139.4
23
189
ø158
133
A
B
C
Positioning brake motor-3 ~
with fast-slow switching
to swivel
(customer)
33
23
4
3
16
15
90
ø80H7
ø40
ø14h6
15
2.9
Hub (-1.5)
7
12
7
16
27
12
61.5
Hole ø16H7 / ø11H7 to
Coupling with
Angular heads, gear units, etc.
ø48g6
ø58
70
M8x1 hole for
Reference point query
M6 (4x)
ø80H7
ø40
ø14h6
ø100
Worm drive
i=12:1
Connector for Servo-
Swivel positioning
Air connection G1/4
Cylinder
18
80
94.4
Pneumatic push tube clamp
(option)
Air connection G 1 / 8 "
ø65f7
M65x1,5
70
90
Stroke 75 or 100mm
Push tube / spindle drive
swiveled 0 °-360 °
360 °-0 °